

LAGAFORS® LOW WATER PRESSURE MOBILE LWP-M



DESCRIPTION & FUNCTION

Lagafors® Low Water Pressure Mobile, LWP-M 2030/4025, is a complete mobile cleaning equipment for flushing with pressurised water and application of chemical foam and disinfectant. The LWP-M is built on a stainless steel frame with six wheels for easy transportation. The unit consists of a low pressure pump, a compressor for pressurised air and a satellite station with an injector and suction hoses for chemicals. Two 25 litres chemical containers can be placed on the trolley which also provides holders for hose and nozzles. LWP-M has a hygienically designed cabinet made in stainless steel that can easily be opened for service and maintenance.

The LWP-M is especially appropriate for cleaning applications in food processing, e.g. in slaughterhouses, meat processing, dairies, breweries, fish industries, prepared food industries, industrial kitchens and other places where a high level of hygiene is required.

- Working pressure 20 bar or 40 bar.
- Mobile unit with a smooth trolley for easy transportation.
- Easy to install; simply connect water and electricity.
- 20 metres hose, spray gun and nozzles for rinse, foam and disinfection are included.

Features	Benefits	Facts
Pressure booster pump	Better cleaning energy on surfaces	From 3-8 bar up to 20-40 bar
Mobile unit	Suitable for cleaning in smaller production facilities	Lower investment than a central system
Compact "all-in-one"-unit	Flexible	Possible to use different chemicals


TECHNICAL INFORMATION

Lagafors® Low Water Pressure Mobile LWP-M

Model	LWP-M 2030	LWP-M 4025
Outgoing water pressure	20-25 bar	35-40 bar
Water consumption	0-30 l/min	0-25 l/min
Capacity	1 user	1 user
Surrounding temperature	5-25 °C	5-25 °C
Relative air humidity	95%	95%
Water Connections		
Water incoming	Quick coupling	Quick coupling
Water supply, flow	> 50 l/min	> 50 l/min
Water supply, pressure	3-8 bar	3-8 bar
Water temperature, max	60 °C	60 °C
Water outgoing	1/2" Hose, 20 metres	1/2" Hose, 20 metres
Electricity		
Voltage	3 x 380-420 V / 50 Hz 3 x 440-480 V / 60 Hz	3 x 380-420 V / 50 Hz 3 x 440-480 V / 60 Hz
Current	4,5 A	9,4 A
Power	2,2 kW	4,6 kW
Dimensions		
Measurements	770 x 1200 x 1500 mm	770 x 1200 x 1500 mm
Weight	140 kg	160 kg

The data is subject to variation and the producer reserves the right to change design specifications without notice.

1003

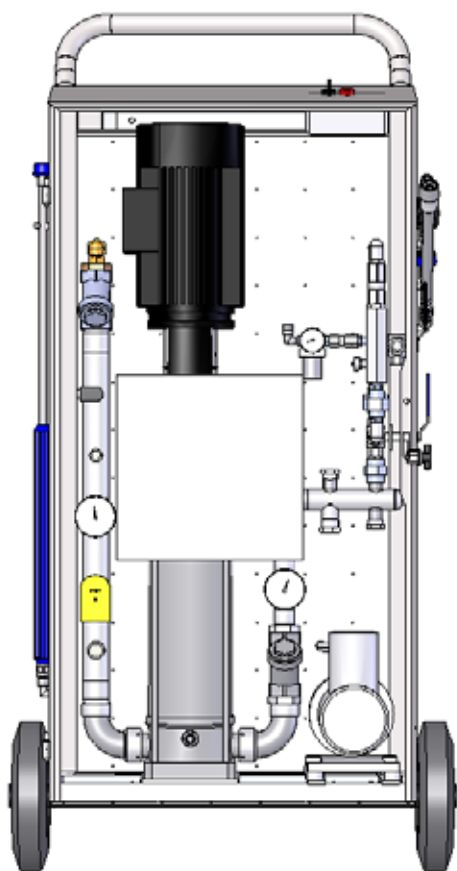

Lagafors® LWP-M 2030

Accessories that are included



Spray gun ST2725



Nozzles for rinsing, foam application & disinfection



Hose 1/2", 20 metres

Local distributor: