



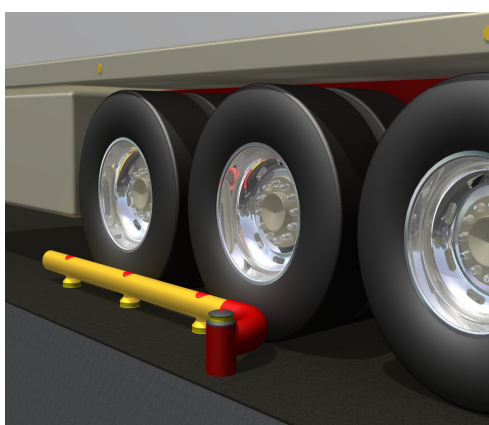

PROTECTIVE ELEMENTS 2009

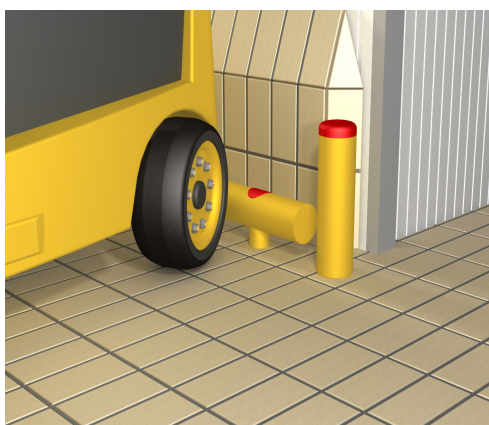

INDEX


1. . . . Index
2. . . . Perfect Plastic Solution
3. . . . Protection Columns HS
4. . . . Protection Fence GRB120
5. . . . Protection Fence GRB120 with Conical Feet
6. . . . Protection Fence GRB70
7. . . . Protection Fence GRB70 with Conical Feet
8. . . . Protection Fence Double GRB70.230
9. . . . Protection Fence Double GRB70.400
10. . . Protection Fence Double GRB70.800
11. . . Trolley Guide FC62.40
12. . . Sanitary Profile PS90.40
13. . . Flat Bumper PMA
15. . . Flat Bumper With Sanitary Profile PPC
17. . . Flat Bumper For Epoxy Flooring PRS
19. . . Truck Aligners AL



Advanced plastic protective elements are built of mechanically and chemically highly resistant techno-polymer. Flexibility, durability and high resistance makes techno-polymers perfect material for protective elements, used in most demanding industrial environments, such as food industry. All protective elements are compliant with HACCP and USDA guidelines.

It's unique anchoring systems makes the installation and maintenance, fast and problem-free. All elements can be easily unmounted in matter of minutes and replaced with new one or turned around.

Large selection of standard elements ensures that optimal solution for every protection issues can be found. Standard elements can be used for protection against impacts of light trollies, heavy trollies, fork lifters with full pallets and even impact of trucks and transport trailers.

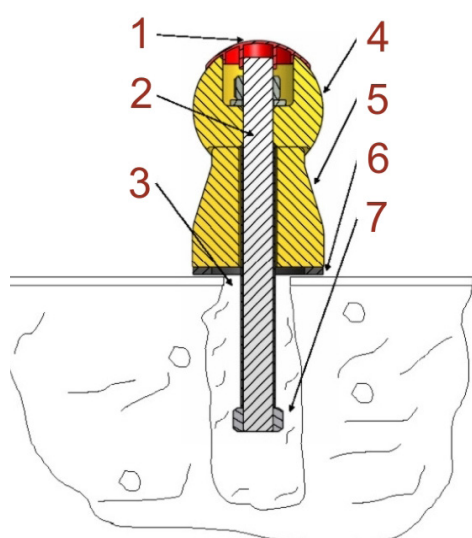

- 1 . Plug GRB70
Hygienically encloses fastening system
- 2 . Screw GRB70
Solid anchoring/fastening core
- 3 . Floor Hole, D36x120mm
Opening in the ground
- 4 . Bar GRB70
Horizontal protection element
- 5 . Conic Spacer
Support feet for protection element
- 6 . Floor Gasket
Hygienically closes gap
- 7 . Quick-Setting Cement
Elastic fixing material

features

- * Constructed of high quality techno-polymer
- * Flexible red plug GRB70 / GRB120
- * In signal yellow color, with flair red plug
- * Floor Gasket made of food-safe rubber
- * Protection elements detachable, via single nut

benefits

- * Modern, flexible, highly-resistant, non-toxic material
- * Hygienically encloses fastening/anchoring system
- * Easy visible colors, which alert operator on proximity of wall
- * Hygienically closes gap between spacer and floor
- * Protection elements can be turned around, shiwtched or replaced with new one - fast & easy




Extremely tough! Protective Truck Aligners AL are suitable for use even with heaviest trucks and trailers.




Universal and practical! Protective fences GRB70 and posts HS70 are optimal for use with trollies.



Universal and practical! Heavy protective fences GRB120 and posts HS118 are made for use with heavy weight trollies, fork lifters and pallet manipulators.

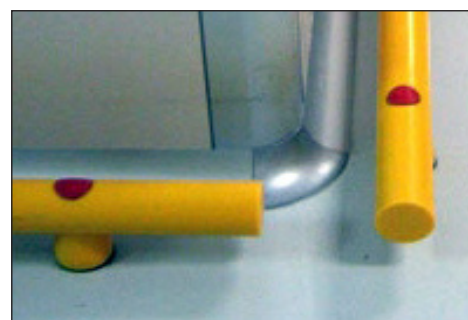

Flexible in use. Execution of outer corner protection with GRB70 .

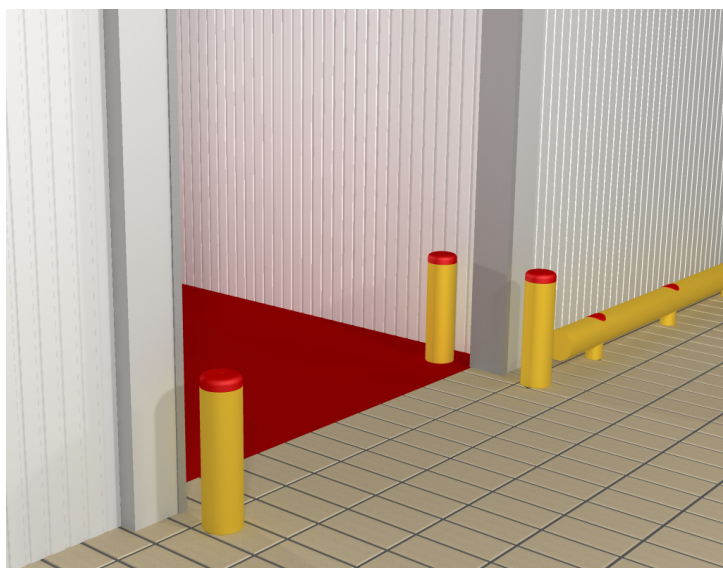

HS is the ideal solution for protecting critical points like doors, projecting column and wall edges, equipments and machinery, placed in areas at risk of collision with moving vehicles.

It combines the DPA300 qualities with the simple but solid anchoring system.

HS bumper post's external elements are rounded, in order to minimize injury to workers in case of impacts. It is corresponding to the current HAC-CP hygienic regulation, because of its atoxicity, high hygiene levels and the anti seepage system, that consists in placing sealing rubber rings between the bumper body and the cast sleeve in the floor.

Protection Column HS70.230

	Dimensions			Code
	Diameter	Height	Weight	HS70230GRA2
	(mm)	(mm)	(kg)	
	70	230	1,6	

Protection Column HS118.436


	Dimensions			Code
	Diameter	Height	Weight	HS118436GRA2
	(mm)	(mm)	(kg)	
	118	436	6,8	

Protection Column HS118.560

	Dimensions			Code
	Diameter	Height	Weight	HS118560GRB1
	(mm)	(mm)	(kg)	
	118	560	8,6	

Protection Column HS118.840

	Dimensions			Code
	Diameter	Height	Weight	HS118840GRB1
	(mm)	(mm)	(kg)	
	118	840	13,1	

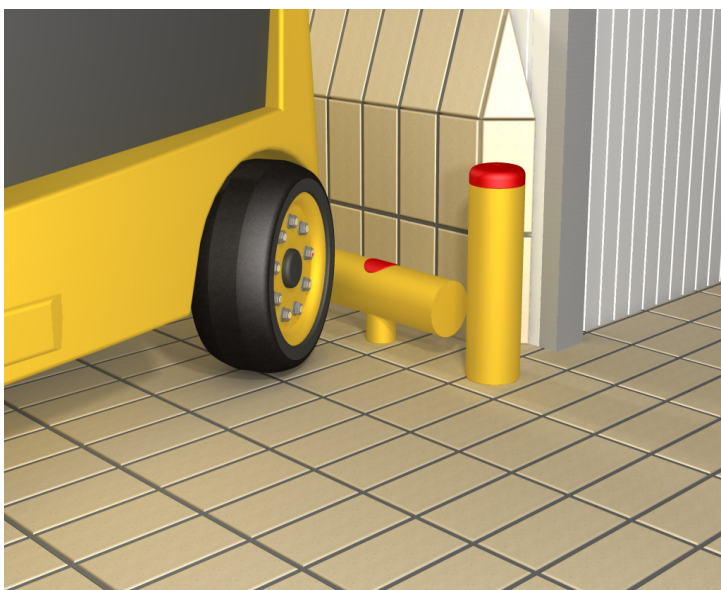

The GRB bumper fence bar is successfully used to protect walls, sliding doors, equipment, machinery perimeters and pedestrian walkways from moving vehicles of every shape or type. Extremely effective against bumps and knocks, this system combines the qualities of the DPA300 composite technopolymer with the simple and extremely solid floor-embedded anchoring bars.

The greatest asset of GRB is that the guardrail discharges on the ground all the force of the knock, absorbed during the impact, leaving the walls protected and untouched. This system offers even more advantages in food environments, where prefabricated isothermic panels are used because of their heat insulation, but they are also vulnerable to knocks and bumps.

Protection Fence GRB120, L=500mm

	Dimensions				Code
	Diameter	Height	Lenght	Weight	GRB120500GA2
	(mm)	(mm)	(mm)	(kg)	
	120	175	500	7,0	

Protection Fence GRB120, L=1000mm


	Dimensions				Code
	Diameter	Height	Lenght	Weight	GRB1201000GA2
	(mm)	(mm)	(mm)	(kg)	
	120	175	1000	12,6	

Protection Fence GRB120, L=1500mm

	Dimensions				Code
	Diameter	Height	Lenght	Weight	GRB1201500GA2
	(mm)	(mm)	(mm)	(kg)	
	120	175	1500	18,8	

Protection Fence GRB120, L=2000mm

	Dimensions				Code
	Diameter	Height	Lenght	Weight	GRB1202000GA2
	(mm)	(mm)	(mm)	(kg)	
	120	175	2000	24,4	

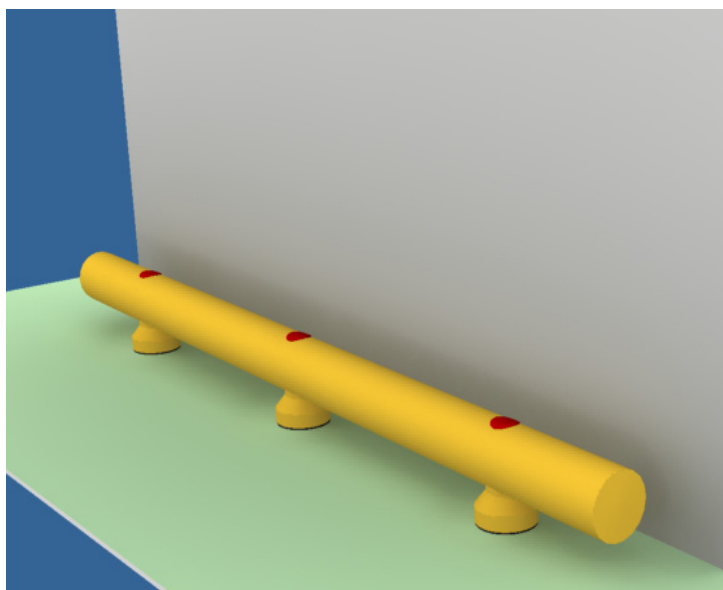

The GRB bumper fence bar is successfully used to protect walls, sliding doors, equipment, machinery perimeters and pedestrian walkways from moving vehicles of every shape or type. Extremely effective against bumps and knocks, this system combines the qualities of the DPA300 composite technopolymer with the simple and extremely solid floor-embedded anchoring bars.

The greatest asset of GRB is that the guardrail discharges on the ground all the force of the knock, absorbed during the impact, leaving the walls protected and untouched. This system offers even more advantages in food environments, where prefabricated isothermic panels are used because of their heat insulation, but they are also vulnerable to knocks and bumps.

Protection Fence GRB120 Cono, L=500mm

	Dimensions				Code
	Diameter	Height	Lenght	Weight	GRB120500GE2
	(mm)	(mm)	(mm)	(kg)	
	120	175	500	7,6	

Protection Fence GRB120, L=1000mm


	Dimensions				Code
	Diameter	Height	Lenght	Weight	GRB1201000GE2
	(mm)	(mm)	(mm)	(kg)	
	120	175	1000	13,2	

Protection Fence GRB120, L=1500mm

	Dimensions				Code
	Diameter	Height	Lenght	Weight	GRB1201500GE2
	(mm)	(mm)	(mm)	(kg)	
	120	175	1500	19,6	

Protection Fence GRB120, L=2000mm

	Dimensions				Code
	Diameter	Height	Lenght	Weight	GRB1202000GE2
	(mm)	(mm)	(mm)	(kg)	
	120	175	2000	25,2	

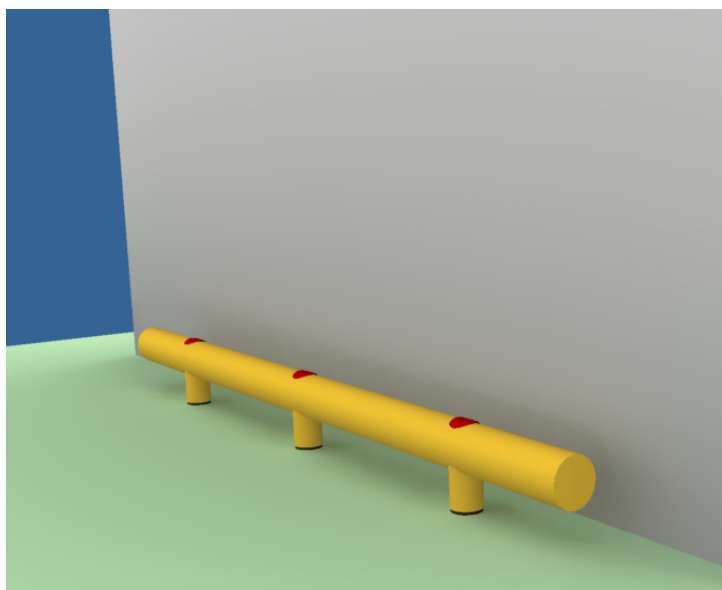

The GRB bumper fence bar is successfully used to protect walls, sliding doors, equipment, machinery perimeters and pedestrian walkways from moving vehicles of every shape or type. Extremely effective against bumps and knocks, this system combines the qualities of the DPA300 composite technopolymer with the simple and extremely solid floor-embedded anchoring bars.

The greatest asset of GRB is that the guardrail discharges on the ground all the force of the knock, absorbed during the impact, leaving the walls protected and untouched. This system offers even more advantages in food environments, where prefabricated isothermic panels are used because of their heat insulation, but they are also vulnerable to knocks and bumps.

Protection Fence GRB70, L=500mm

	Dimensions				Code
	Diameter	Height	Lenght	Weight	GRB70500GA2
	(mm)	(mm)	(mm)	(kg)	
	70	125	500	2,6	

Protection Fence GRB70, L=1000mm


	Dimensions				Code
	Diameter	Height	Lenght	Weight	GRB701000GA2
	(mm)	(mm)	(mm)	(kg)	
	70	125	1000	4,6	

Protection Fence GRB70, L=1500mm

	Dimensions				Code
	Diameter	Height	Lenght	Weight	GRB701500GA2
	(mm)	(mm)	(mm)	(kg)	
	70	125	1500	6,8	

Protection Fence GRB70, L=2000mm

	Dimensions				Code
	Diameter	Height	Lenght	Weight	GRB702000GA2
	(mm)	(mm)	(mm)	(kg)	
	70	125	2000	8,8	

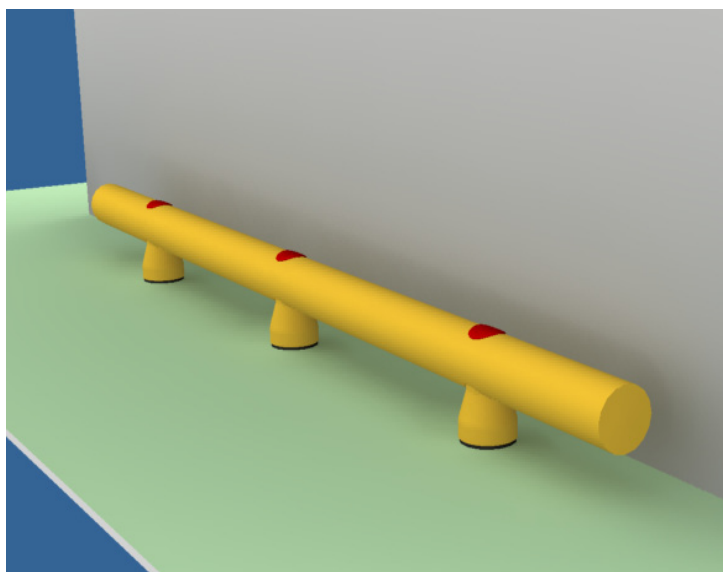

The GRB bumper fence bar is successfully used to protect walls, sliding doors, equipment, machinery perimeters and pedestrian walkways from moving vehicles of every shape or type. Extremely effective against bumps and knocks, this system combines the qualities of the DPA300 composite technopolymer with the simple and extremely solid floor-embedded anchoring bars.

The greatest asset of GRB is that the guardrail discharges on the ground all the force of the knock, absorbed during the impact, leaving the walls protected and untouched. This system offers even more advantages in food environments, where prefabricated isothermic panels are used because of their heat insulation, but they are also vulnerable to knocks and bumps.

Protection Fence GRB70 Cono, L=500mm

	Dimensions				Code
	Diameter	Height	Lenght	Weight	GRB70500GI2
	(mm)	(mm)	(mm)	(kg)	
	70	125	500	2,8	

Protection Fence GRB70 Cono, L=1000mm


	Dimensions				Code
	Diameter	Height	Lenght	Weight	GRB701000GI2
	(mm)	(mm)	(mm)	(kg)	
	70	125	1000	4,7	

Protection Fence GRB70 Cono, L=1500mm

	Dimensions				Code
	Diameter	Height	Lenght	Weight	GRB701500GI2
	(mm)	(mm)	(mm)	(kg)	
	70	125	1500	7,0	

Protection Fence GRB70 Cono, L=2000mm

	Dimensions				Code
	Diameter	Height	Lenght	Weight	GRB702000GI2
	(mm)	(mm)	(mm)	(kg)	
	70	125	2000	9,0	

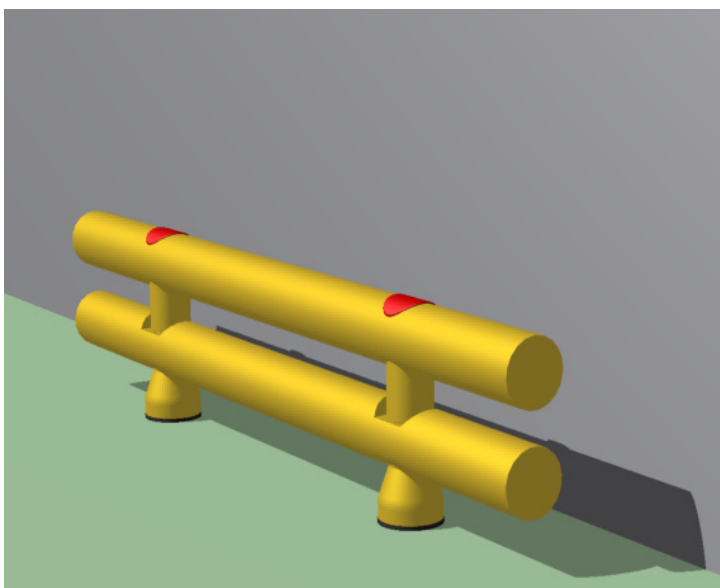

The GRB bumper fence bar is successfully used to protect walls, sliding doors, equipment, machinery perimeters and pedestrian walkways from moving vehicles of every shape or type. Extremely effective against bumps and knocks, this system combines the qualities of the DPA300 composite technopolymer with the simple and extremely solid floor-embedded anchoring bars.

The greatest asset of GRB is that the guardrail discharges on the ground all the force of the knock, absorbed during the impact, leaving the walls protected and untouched. This system offers even more advantages in food environments, where prefabricated isothermic panels are used because of their heat insulation, but they are also vulnerable to knocks and bumps.

Protection Fence GRB70, H=230mm, L=500mm

	Dimensions				Code
	Diameter	Height	Lenght	Weight	GRB70500GP2
	(mm)	(mm)	(mm)	(kg)	
	70	230	500	5,4	

Protection Fence GRB70, H=230mm, L=1000mm


	Dimensions				Code
	Diameter	Height	Lenght	Weight	GRB701000GP2
	(mm)	(mm)	(mm)	(kg)	
	70	230	1000	9,0	

Protection Fence GRB70, H=230mm, L=1500mm

	Dimensions				Code
	Diameter	Height	Lenght	Weight	GRB701500P2
	(mm)	(mm)	(mm)	(kg)	
	70	230	1500	13,4	

Protection Fence GRB70, H=230mm, L=2000mm

	Dimensions				Code
	Diameter	Height	Lenght	Weight	GRB702000GP2
	(mm)	(mm)	(mm)	(kg)	
	70	230	2000	17,4	

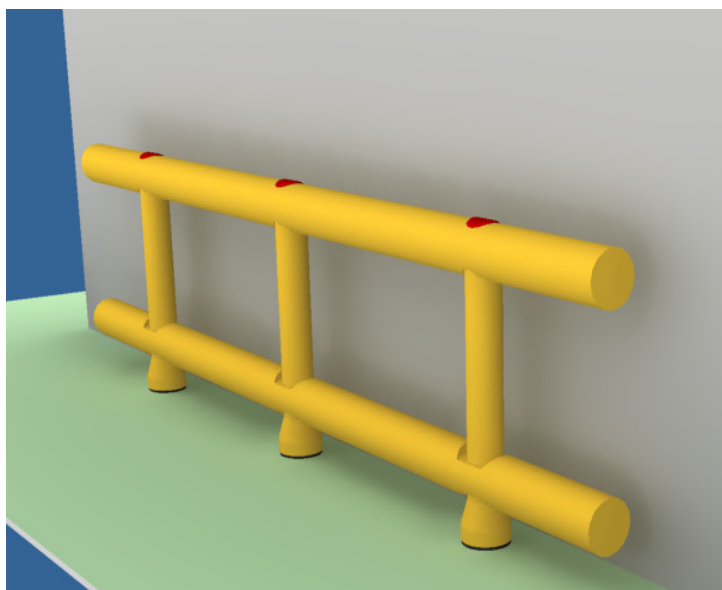

The GRB bumper fence bar is successfully used to protect walls, sliding doors, equipment, machinery perimeters and pedestrian walkways from moving vehicles of every shape or type. Extremely effective against bumps and knocks, this system combines the qualities of the DPA300 composite technopolymer with the simple and extremely solid floor-embedded anchoring bars.

The greatest asset of GRB is that the guardrail discharges on the ground all the force of the knock, absorbed during the impact, leaving the walls protected and untouched. This system offers even more advantages in food environments, where prefabricated isothermic panels are used because of their heat insulation, but they are also vulnerable to knocks and bumps.

Protection Fence GRB70, H=400mm, L=500mm

	Dimensions				Code
	Diameter	Height	Lenght	Weight	GRB70500GC2
	(mm)	(mm)	(mm)	(kg)	
	70	400	500	7,5	

Protection Fence GRB70, H=400mm, L=1000mm


	Dimensions				Code
	Diameter	Height	Lenght	Weight	GRB701000GC2
	(mm)	(mm)	(mm)	(kg)	
	70	400	1000	11,1	

Protection Fence GRB70, H=400mm, L=1500mm

	Dimensions				Code
	Diameter	Height	Lenght	Weight	GRB701500GC2
	(mm)	(mm)	(mm)	(kg)	
	70	400	1500	17,0	

Protection Fence GRB70, H=400mm, L=2000mm

	Dimensions				Code
	Diameter	Height	Lenght	Weight	GRB702000GC2
	(mm)	(mm)	(mm)	(kg)	
	70	400	2000	21,0	

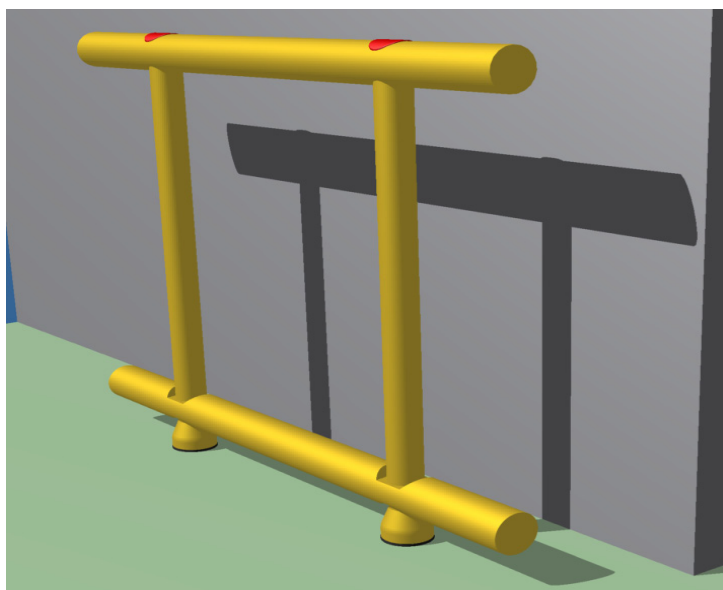

The GRB bumper fence bar is successfully used to protect walls, sliding doors, equipment, machinery perimeters and pedestrian walkways from moving vehicles of every shape or type. Extremely effective against bumps and knocks, this system combines the qualities of the DPA300 composite technopolymer with the simple and extremely solid floor-embedded anchoring bars.

The greatest asset of GRB is that the guardrail discharges on the ground all the force of the knock, absorbed during the impact, leaving the walls protected and untouched. This system offers even more advantages in food environments, where prefabricated isothermic panels are used because of their heat insulation, but they are also vulnerable to knocks and bumps.

Protection Fence GRB70, H=800mm, L=500mm

	Dimensions				Code
	Diameter	Height	Lenght	Weight	GRB70500GE2
	(mm)	(mm)	(mm)	(kg)	
	70	800	500	11,2	

Protection Fence GRB70, H=800mm, L=1000mm

	Dimensions				Code
	Diameter	Height	Lenght	Weight	GRB701000GE2
	(mm)	(mm)	(mm)	(kg)	
	70	800	1000	14,8	

Protection Fence GRB70, H=800mm, L=1500mm

	Dimensions				Code
	Diameter	Height	Lenght	Weight	GRB701500GE2
	(mm)	(mm)	(mm)	(kg)	
	70	800	1500	22,2	

Protection Fence GRB70, H=800mm, L=2000mm

	Dimensions				Code
	Diameter	Height	Lenght	Weight	GRB702000GE2
	(mm)	(mm)	(mm)	(kg)	
	70	800	2000	26,0	



This is a system designed to protect the walls, sliding doors, machinery perimeters and pedestrian walkways from trolleys on wheels moved by the operator.

It combines the quality of DPA300 technopolymer with the simple and extremely solid floor anchoring system. The FC62 half bar, fixed into the floor, creates an insurmountable barrier for the trolley, leaving the walls untouched and protected.

This system offers even more advantages in food environments, where prefabricated isothermal panels are used because of their heat insulation, but they are also vulnerable to knock and bumps.

Trolley Guide FC62.40, L=500mm

	Dimensions				Code
	Width	Height	Lenght	Weight	FC62500GRA1
	(mm)	(mm)	(mm)	(kg)	
	62	40	500	1,2	

Protection Fence GRB70, H=800mm, L=1000mm


	Dimensions				Code
	Width	Height	Lenght	Weight	FC621000GRA1
	(mm)	(mm)	(mm)	(kg)	
	62	40	1000	2,5	

Protection Fence GRB70, H=800mm, L=1500mm

	Dimensions				Code
	Width	Height	Lenght	Weight	FC621500GRA1
	(mm)	(mm)	(mm)	(kg)	
	62	40	1500	3,7	

Protection Fence GRB70, H=800mm, L=2000mm

	Dimensions				Code
	Width	Height	Lenght	Weight	FC622000GRA1
	(mm)	(mm)	(mm)	(kg)	
	62	40	2000	4,3	

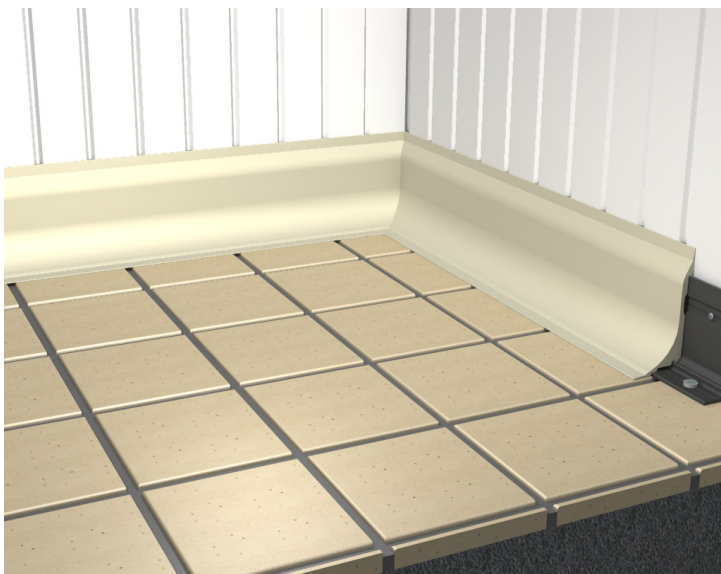

The PS90.40 hygienic edge is the ideal solution for connecting and sealing the corner between the wall and the floor, isolating against seepages and dirtiness besides guaranteeing excellent resistance against accidental knocks.

It is made in semi-rigid full cross-section composite P.V.C., the surface is perfectly sleek, and the housing for the sealing glue between the surface hides the wall fixing mechanical system. It is correspondent to the current regulations. The auxiliary rear anchoring edge is made in semi-rigid composite P.V.C.

This item is available in three different colors: white, klinker and grey.

Sanitary Profile PS90.40 for PANNEL Installation

	Dimensions				
	Width	Height	Lenght	Weight	
	(mm)	(mm)	(mm)	(kg)	
	40	90	2000	3,0	

Sanitary Profile PS90.40 for WALL Installation

	Dimensions				
	Width	Height	Lenght	Weight	
	(mm)	(mm)	(mm)	(kg)	
	40	90	2000	3,0	

Sanitary Profile PS90.40 for LIGHT WALL Installation

	Dimensions				
	Width	Height	Lenght	Weight	
	(mm)	(mm)	(mm)	(kg)	
	40	90	2000	3,0	

Color Availability

	Installation to	1. white	2. gray	3. cream	
	Pannel	Yes	Yes	Yes	
	Wall	Yes	Yes	Yes	
	Light Wall	Yes	Yes	Yes	



The plate extruded bumper is the best solution to protect walls from the accidental bumps caused by moving trolleys. It is realized in DPA200 composite technopolymer, with high chemical, physical and mechanical properties.

It is obtained by means of a high precision extrusion process that guarantees a perfectly sleek external surface. It is rigid and it has a solid cross-section. Provided with upper and lower edges (except model PRS) and a contact seal made in coextruded rubber the bumper plate, besides guaranteeing an effective shockproof function, is also waterproof and eliminates every eventual seepage or dirtiness deposit between the sheet and the wall.

Flat Bumper PMA, Straight Piece

	Dimensions				Code
	Width	Height	Lenght	Weight	
	(mm)	(mm)	(mm)	(kg)	
	15	170	1500	3,1	PMA170
	15	245	1500	4,5	PMA245
	15	295	1500	5,4	PMA295
	15	380	1500	7,0	PMA380
	15	545	1500	10,0	PMA545
	15	795	1500	14,5	PMA795
	15	1000	1500	18,2	PMA1000

Flat Bumper PMA, Internal Corner

	Dimensions				Code
	Width	Height	Lenght	Weight	
	(mm)	(mm)	(mm)	(kg)	
	15	170	60x80	0,3	AIPMA170
	15	245	60x80	0,5	AIPMA245
	15	295	60x80	0,6	AIPMA295
	15	380	60x80	0,7	AIPMA380
	15	545	60x80	1,0	AIPMA545
	15	795	60x80	1,5	AIPMA795
	15	1000	60x80	1,9	AIPMA1000

Flat Bumper PMA, External Corner

	Dimensions				Code
	Width	Height	Lenght	Weight	
	(mm)	(mm)	(mm)	(kg)	
	15	170	60x80	0,3	AEMA170
	15	245	60x80	0,5	AEMA245
	15	295	60x80	0,6	AEMA295
	15	380	60x80	0,7	AEMA380
	15	545	60x80	1,0	AEMA545
	15	795	60x80	1,4	AEMA795
	15	1000	60x80	1,8	AEMA1000

Flat Bumper PMA, Ending

	Dimensions				Code
	Width	Height	Lenght	Weight	
	(mm)	(mm)	(mm)	(kg)	
	15	170	80	0,2	TD(S)PMA170
	15	245	80	0,3	TD(S)PMA245
	15	295	80	0,4	TD(S)PMA295
	15	380	80	0,5	TD(S)PMA380
	15	545	80	0,7	TD(S)PMA545
	15	795	80	1,0	TD(S)PMA795
	15	1000	80	1,2	TD(S)PMA1000



The plate extruded bumper is the best solution to protect walls from the accidental bumps caused by moving trolleys. It is realized in DPA200 composite technopolymer, with high chemical, physical and mechanical properties.

It is obtained by means of a high precision extrusion process that guarantees a perfectly sleek external surface. It is rigid and it has a solid cross-section. Provided with upper and lower edges (except model PRS) and a contact seal made in coextruded rubber the bumper plate, besides guaranteeing an effective shockproof function, is also waterproof and eliminates every eventual seepage or dirtiness deposit between the sheet and the wall.

Flat Bumper PPC, Straight Piece

	Dimensions				Code
	Width	Height	Lenght	Weight	
	(mm)	(mm)	(mm)	(kg)	
	15	170	1500	3,5	PPC170
	15	245	1500	5,1	PPC245
	15	295	1500	6,1	PPC295
	15	380	1500	7,9	PPC380
	15	545	1500	11,3	PPC545
	15	795	1500	16,5	PPC795
	15	1000	1500	20,7	PPC1000

Flat Bumper PPC, Internal Corner


	Dimensions				Code
	Width	Height	Lenght	Weight	
	(mm)	(mm)	(mm)	(kg)	
	15	170	60x80	0,3	AIPPC170
	15	245	60x80	0,5	AIPPC245
	15	295	60x80	0,6	AIPPC295
	15	380	60x80	0,8	AIPPC380
	15	545	60x80	1,0	AIPPC545
	15	795	60x80	1,6	AIPPC795
	15	1000	60x80	2,0	AIPPC1000

Flat Bumper PPC, External Corner

	Dimensions				Code
	Width	Height	Lenght	Weight	
	(mm)	(mm)	(mm)	(kg)	
	15	170	60x80	0,3	AEPPC170
	15	245	60x80	0,5	AEPPC245
	15	295	60x80	0,6	AEPPC295
	15	380	60x80	0,7	AEPPC380
	15	545	60x80	1,0	AEPPC545
	15	795	60x80	1,5	AEPPC795
	15	1000	60x80	1,9	AEPPC1000

Flat Bumper PPC, Ending

	Dimensions				Code
	Width	Height	Lenght	Weight	
	(mm)	(mm)	(mm)	(kg)	
	15	170	80	0,2	TD(S)PPC170
	15	245	80	0,3	TD(S)PPC245
	15	295	80	0,4	TD(S)PPC295
	15	380	80	0,5	TD(S)PPC380
	15	545	80	0,7	TD(S)PPC545
	15	795	80	1,0	TD(S)PPC795
	15	1000	80	1,3	TD(S)PPC1000

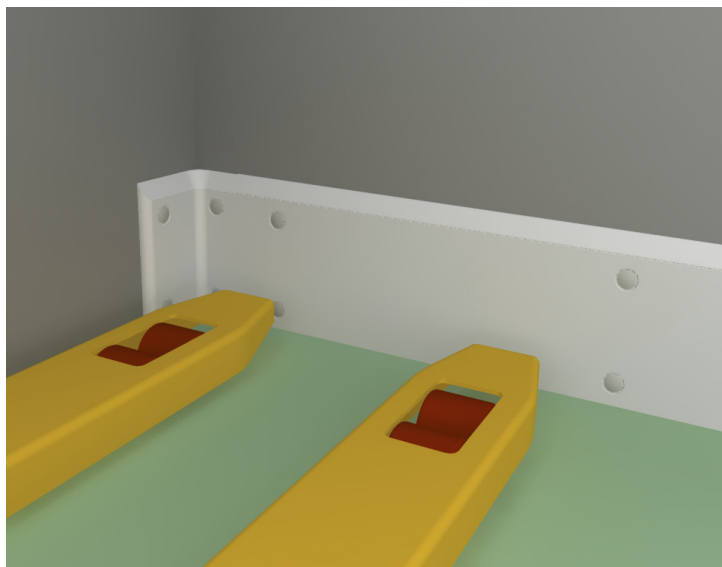

The plate extruded bumper is the best solution to protect walls from the accidental bumps caused by moving trolleys. It is realized in DPA200 composite technopolymer, with high chemical, physical and mechanical properties.

It is obtained by means of a high precision extrusion process that guarantees a perfectly sleek external surface. It is rigid and it has a solid cross-section. Provided with upper and lower edges (except model PRS) and a contact seal made in coextruded rubber the bumper plate, besides guaranteeing an effective shockproof function, is also waterproof and eliminates every eventual seepage or dirtiness deposit between the sheet and the wall.

Flat Bumper PRS, Straight Piece

	Dimensions				Code
	Width	Height	Lenght	Weight	
	(mm)	(mm)	(mm)	(kg)	
	15	145	1500	2,7	PRS145
	15	220	1500	4,1	PRS220
	15	270	1500	5,0	PRS270
	15	355	1500	6,6	PRS355
	15	520	1500	9,6	PRS520
	15	770	1500	14,2	PRS770
	15	1000	1500	18,4	PRS1000

Flat Bumper PRS, Internal Corner


	Dimensions				Code
	Width	Height	Lenght	Weight	
	(mm)	(mm)	(mm)	(kg)	
	15	145	60x80	0,3	AIPRS145
	15	220	60x80	0,4	AIPRS220
	15	270	60x80	0,5	AIPRS270
	15	355	60x80	0,6	AIPRS355
	15	520	60x80	1,0	AIPRS520
	15	770	60x80	1,4	AIPRS770
	15	1000	60x80	1,8	AIPRS1000

Flat Bumper PPC, External Corner

	Dimensions				Code
	Width	Height	Lenght	Weight	
	(mm)	(mm)	(mm)	(kg)	
	15	145	60x80	0,3	AIPRS145
	15	220	60x80	0,4	AIPRS220
	15	270	60x80	0,5	AIPRS270
	15	355	60x80	0,7	AIPRS355
	15	520	60x80	1,0	AIPRS520
	15	770	60x80	1,4	AIPRS770
	15	1000	60x80	1,8	AIPRS1000

Flat Bumper PPC, Ending

	Dimensions				Code
	Width	Height	Lenght	Weight	
	(mm)	(mm)	(mm)	(kg)	
	15	145	80	0,2	TD(S)PRS170
	15	220	80	0,3	TD(S)PRS220
	15	270	80	0,3	TD(S)PRS270
	15	355	80	0,4	TD(S)PRS355
	15	520	80	0,6	TD(S)PRS520
	15	770	80	0,9	TD(S)PRS770
	15	1000	80	1,2	TD(S)PRS1000

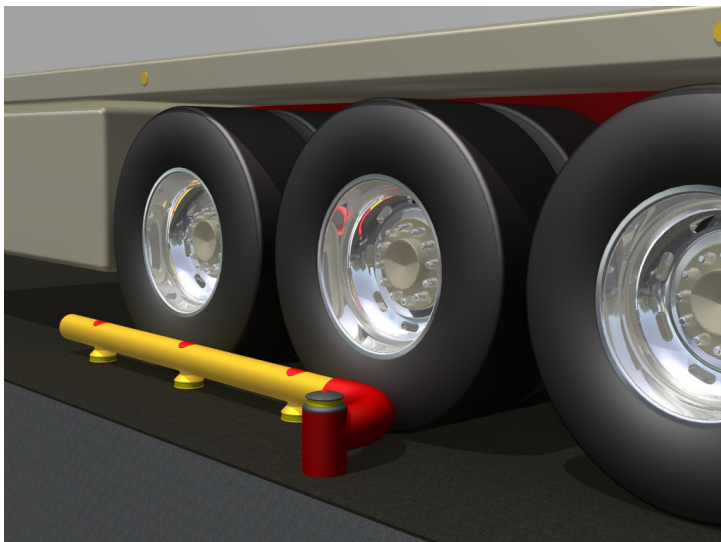

AL120 aligner for vehicles is the ideal way to protect from the moving vehicles either the structure of the sealing portal or the lifting foot-board at the loading-unloading points, or the equipment and machinery placed outside the premises, or pedestrian crossings inside the factory.

It's an effective bumper system made in DPA, a composite technopolymer with high chemical, physical and mechanical properties. This item has a simple but extremely solid anchoring system.

The excellent mechanical qualities that characterizes this article are the high resistance to wear, impacts, torsion, weather and dump, and the low friction coefficient. It is corresponding to the current work safety regulation.

Truck Aligner AL120.2500 Cono, Right

	Dimensions				Code
	Diameter	Height	Lenght	Weight	ALD1202500GB3
	(mm)	(mm)	(mm)	(kg)	
	120	240	2500	45	

Truck Aligner AL120.2500 Cono, Left

	Dimensions				Code
	Diameter	Height	Lenght	Weight	ALS1202500GB3
	(mm)	(mm)	(mm)	(kg)	
	120	240	2500	45	

Truck Aligner AL120.4500 Cono, Right

	Dimensions				Code
	Diameter	Height	Lenght	Weight	ALD1204500GB3
	(mm)	(mm)	(mm)	(kg)	
	120	240	4500	70	

Truck Aligner AL120.4500 Cono, Left

	Dimensions				Code
	Diameter	Height	Lenght	Weight	ALS1204500GB3
	(mm)	(mm)	(mm)	(kg)	
	120	240	4500	70	